


Dimensions

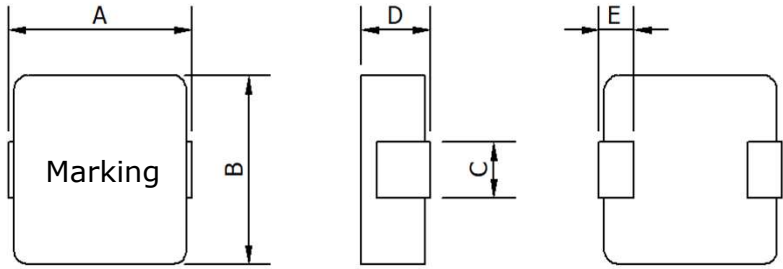


A	B	C	D	E
5.6± 0.5 mm	5.2± 0.3 mm	2.0±0.3 mm	2.0Max. mm	1.3±0.3 mm

Product Marking

Product Marking	4R7 (Inductance Code)
-----------------	-----------------------

Schematic Drawing



Equivalent Circuit

Electrical Properties

Properties		Value	Unit	Tol.	Test Conditions
Inductance	L	4.7	μH	±20%	100KHz 1.0V
Heat Rating Current	I _{rms}	2.8	A	Typ.	
Saturation Current	I _{sat}	4.2	A	Typ.	L 4.2A drop 30% MAX. @ 100KHz/1.0V
DC Resistance	R _{DC}	74.0	mΩ	Typ.	
DC Resistance	R _{DC}	96.0	mΩ	Max	

Operating temperature range: -45 to + 125 °C


Storage condition:

Temperature Range: 0°C ~ 35°C; -40°C ~ 105°C (after PCB)

Humidity Range: 50% ~ 70% RH

Packaging: Taping : 3000 Piece/reel

Recommended land pattern

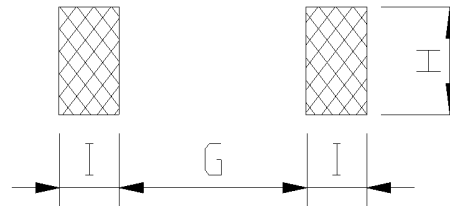

G	1.90 mm (REF)
H	2.50 mm (REF)
I	2.15 mm (REF)