


## Dimensions

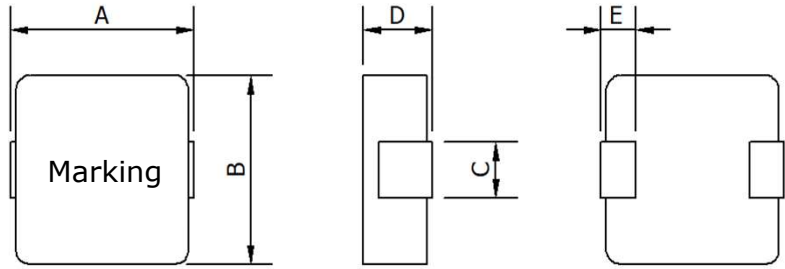


| A             | B             | C             | D             | E             |
|---------------|---------------|---------------|---------------|---------------|
| 7.1±0.5<br>mm | 6.6±0.3<br>mm | 3.0±0.3<br>mm | 5.0Max.<br>mm | 1.6±0.3<br>mm |

## Product Marking

|                 |                       |
|-----------------|-----------------------|
| Product Marking | 4R7 (Inductance Code) |
|-----------------|-----------------------|

## Schematic Drawing



Equivalent Circuit

## Electrical Properties

| Properties          |                  | Value | Unit | Tol. | Test Conditions                       |
|---------------------|------------------|-------|------|------|---------------------------------------|
| Inductance          | L                | 4.7   | μH   | ±20% | 100KHz 1.0V                           |
| Heat Rating Current | I <sub>rms</sub> | 6.0   | A    | Typ. |                                       |
| Saturation Current  | I <sub>sat</sub> | 9.0   | A    | Typ. | L 9.0A drop 30% MAX.<br>@ 100KHz/1.0V |
| DC Resistance       | R <sub>DC</sub>  | 19.0  | mΩ   | Typ. |                                       |
| DC Resistance       | R <sub>DC</sub>  | 23.0  | mΩ   | Max  |                                       |

Operating temperature range: -45 to + 125 °C


Storage condition:

Temperature Range: 0°C ~ 35°C; -40°C ~ 105°C (after PCB)

Humidity Range: 50% ~ 70% RH

Packaging: Taping : 1000 Piece/reel

## Recommended land pattern

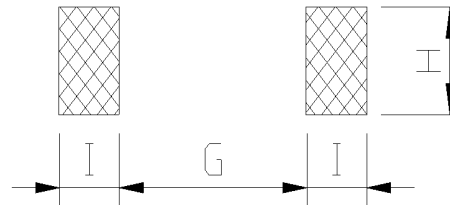

|          |               |
|----------|---------------|
| <b>G</b> | 2.40 mm (REF) |
| <b>H</b> | 3.50 mm (REF) |
| <b>I</b> | 2.70 mm (REF) |