


Dimensions

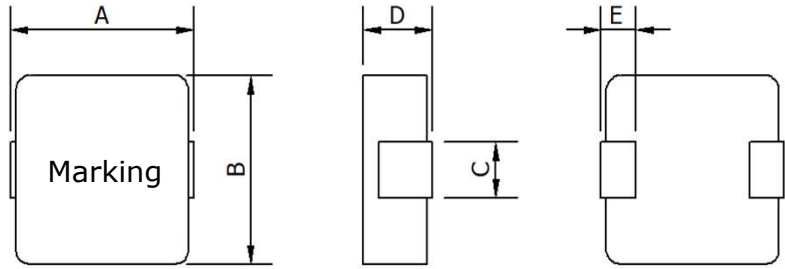


A	B	C	D	E
5.49±0.4 mm	5.18±0.3 mm	2.0±0.3 mm	3.0Max. mm	1.1±0.3 mm

Product Marking

Product Marking	330 (Inductance Code)
-----------------	-----------------------

Schematic Drawing



Equivalent Circuit

Electrical Properties

Properties		Value	Unit	Tol.	Test Conditions
Inductance	L	33.0	μH	±20%	100KHz 1.0V
Heat Rating Current	I _{rms}	1.2	A	Typ.	
Saturation Current	I _{sat}	2.5	A	Typ.	L 2.5A drop 30% MAX. @ 100KHz/1.0V
DC Resistance	R _{DC}	330	mΩ	Typ.	
DC Resistance	R _{DC}	372	mΩ	Max	

Operating temperature range: -45 to + 125 °C


Storage condition:

Temperature Range: 0°C ~ 35°C; -40°C ~ 105°C (after PCB)

Humidity Range: 50% ~ 70% RH

Packaging: Taping : 2000 Piece/reel

Recommended land pattern

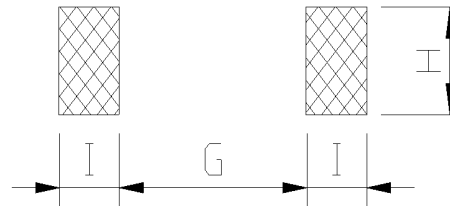

G	1.80 mm (REF)
H	2.50 mm (REF)
I	2.00 mm (REF)